



Europäisches Patentamt  
GD1

European Patent Office  
DG1

Office européen des brevets  
DG1

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr.

Patent application No.

Demande de brevet n°

99307065.5 / EP99307065

The organization code and number of your priority application, to be used for filing abroad under the Paris Convention, is EP99307065

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R.C. van Dijk

THIS PAGE BLANK (USPTO)

**THIS PAGE BLANK (USPTO)**



Anmeldung Nr.:  
Application no.: 99307065.5  
Demande no.:

Anmeldetag:  
Date of filing: 06.09.99  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.  
Carel van Bylandtlaan 30  
2596 HR Den Haag/NL

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Mixing device

In anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)  
Staat/Tag/Aktenzeichen / State/Date/File no. / Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation / International Patent Classification / Classification internationale de brevets:

F23C

Am Anmeldetag benannte Vertragsstaaten / Contracting states designated at date of filing / Etats contractants désignées lors du dépôt:


AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE

THIS PAGE BLANK (USPTO)

# MIXING DEVICE

The present invention concerns catalytic partial oxidation of a fuel. In particular the present invention relates to a mixing device suitable for mixing a gaseous stream comprising a fuel and a gaseous oxidant, to a reactor for the partial oxidation of the fuel comprising such a mixing device, and to a catalytic partial oxidation process using such a mixing device.

Partial oxidation of a fuel, in particular hydrocarbons, in the presence of a catalyst is an attractive route for the preparation of mixtures of carbon monoxide and hydrogen, normally referred to as synthesis gas. The partial oxidation of paraffinic hydrocarbons is an exothermic reaction represented by the equation:



There is literature in abundance on the catalysts and the process conditions for the catalytic partial oxidation of gaseous hydrocarbons, in particular methane. Reference is made, for instance, to EP-A-303 438, US-A-5,149,464, and International patent application WO 92/11199.

Since the catalytic partial oxidation reaction proceeds at very short contact times (in the order of tens of milliseconds), it is necessary that the reactants are well-mixed when brought into contact with the catalyst. Otherwise, the reaction will proceed at an undesirable stoichiometry and the desired product selectivity will not be obtained.

The mixture of the reactants of the catalytic partial oxidation process, i.e. a hydrocarbonaceous fuel and an oxygen-containing gas, is highly reactive and explosive, especially at the mixing conditions which are applied, i.e. at elevated temperature and pressure and in amounts giving an oxygen-to-carbon ratio in the range of from 0.3 to 0.8.

In general, the risk of explosions and uncontrolled gas-phase reactions is higher when the mixture contains more oxygen. In order to minimise the occurrence of stagnant or quasi-stagnant oxygen-rich zones in the mixer, it is important that the fuel and the oxygen-containing gas are rapidly mixed, i.e. that a high degree of mixedness is achieved within a short time after the reactants are initially contacted with each other. Reference to oxygen-rich zones is to zones wherein the oxygen concentration is higher than in the completely-mixed mixture.

The degree of mixedness can, for example, be quantified by the relative deviation in the ratio of the mole fractions of the hydrocarbonaceous fuel and the oxygen-containing gas. This relative deviation is abbreviated as  $\gamma$  and defined as follows:

$$\gamma = \frac{(X_{HC} / X_{O_2})_{\max} - (X_{HC} / X_{O_2})_{\min}}{2.(X_{HC} / X_{O_2})_{av}}$$

wherein  $X_{HC}$  and  $X_{O_2}$  are the mole fractions of the hydrocarbonaceous fuel and of the oxygen-containing gas, respectively, in the mixture. The subscripts 'min', 'max', and 'av' designate the minimum, maximum, and average ratios found in the mixture. A low value for  $\gamma$  corresponds with a high degree of mixedness and vice versa. A value for  $\gamma$  of 0 means a completely-mixed mixture. The degree of mixedness at a certain distance from the point where the reactants are initially

contacted can be quantified by measuring the time-averaged values for  $X_{HC}/X_{O_2}$  at different locations within the plane perpendicular to the flow direction of the mixture at that certain distance.

5         Mixers should be such that a low time-averaged value for  $\gamma$  is achieved at a short distance from the initial point of contact or within a short time after initial contact between the reactants. Preferably, a value for  $\gamma$  below 0.1, more preferably below 0.05, is achieved within  
10         a residence time of 15 milliseconds.

It is not only important that the time-averaged values for  $\gamma$  are low, but also that the flow has a high stability, i.e. that the fluctuations in the ratio  $X_{HC}/X_{O_2}$  at a single location and at short time scales are  
15         small. Reference to short time scales is to time scales in the order of the thermal response time of the upstream surface of the catalyst bed, typically in the order of tens of milliseconds. The flow stability can be quantified by the measure  $\delta$ , which is the quotient of the  
20         root mean square and the average of the values of the ratio  $X_{HC}/X_{O_2}$  measured several times at a single location, each measurement with a short sampling time. Thus  $\delta$  is defined as:

$$\delta = \frac{\sqrt{\frac{\sum_{i=1}^n ((X_{HC}/X_{O_2})_i - (X_{HC}/X_{O_2})_{av})^2}{(n-1)}}}{(X_{HC}/X_{O_2})_{av}}$$

wherein  $n$  is the number of measurements of  $X_{HC}/X_{O_2}$  at a  
25         single location, each measurement carried out with a short sampling time. Ideally, the value for  $\delta$  is of the same order of magnitude or smaller than the time-averaged value for  $\gamma$ .

Further, in order to avoid uncontrolled gas-phase reactions, in particular ignition, the residence time of a feed mixture in a mixer should be below the auto ignition delay time of that mixture.

5       Mixing devices suitable for mixing a hydro-carbonaceous fuel and an oxygen-containing gas are known, for example in the art of acetylene production or in the art of catalytic partial oxidation of hydrocarbons.

10       EP-A-303 439 discloses a gas mixer and distributor for feeding a mixture of a hydrocarbon feedstock and an oxygen-rich gas to a catalytic reactor section. In the gas mixer, one of the gases is radially injected by means of inlet holes into a tube wherein the other gas is flowing. Thus, the radially injected gas impinges upon  
15       the other gas.

      WO 98/49095 discloses an injector/reactor apparatus for the partial oxidation of light hydrocarbon gases, comprising a manifold of mixing nozzles upstream of a catalytic partial oxidation zone. The disclosed mixing  
20       nozzles are mixing cups into which one gas stream is injected from an axial orifice as an axial stream and the other gas is injected from one or more radial orifices as one or more somewhat radial streams which impinge upon the axial stream.

25       A disadvantage of impinging jets is that they can lead to flow instabilities, i.e. fluctuations in the gas composition at short time scales and thus a high value for  $\delta$ . Flow instabilities lead to local temperature fluctuations at the upstream surface of the catalyst and,  
30       therefore, deteriorate the life-time of the catalyst.

      Thus, there is a need in the art for mixing devices wherein a hydrocarbonaceous fuel and an oxygen-containing gas can be mixed at a high mixing rate, but also with a high flow stability.



Surprisingly it has been found that a very high mixing rate, at a high flow stability can be achieved by using a novel mixing device wherein a gaseous stream containing the hydrocarbonaceous fuel is tangentially injected perpendicular to an axially-injected, oxygen-containing stream, without the occurrence of impingement. Accordingly, the mixing device of the present invention comprises a cylindrical mixing chamber, means for injecting a gaseous stream comprising a fuel tangentially along the inner surface of the wall of the mixing chamber, and means for injecting a gaseous stream of oxidant axially along the central longitudinal axis of the mixing chamber, wherein the diameter of the mixing chamber and the dimensions and location of the means for injecting the fuel and the oxidant are such that, during normal operation, the tangentially injected stream comprising the fuel forms a wall jet around the axially injected stream of the oxidant without impinging upon the axially injected stream.

The mixing device of the present invention is particularly suitable for mixing a hydrocarbonaceous fuel and an oxygen-containing gas, prior to the partial oxidation of the hydrocarbonaceous fuel. Accordingly, the present invention further relates to a reactor comprising a mixing device as hereinbefore defined and a partial oxidation zone.

The partial oxidation zone may be any partial oxidation zone known in the art, such as a non-catalytic partial oxidation zone, an autothermal reforming zone or a catalytic partial oxidation zone, preferably a catalytic partial oxidation zone.

The mixing device and the reactor of the invention will now be illustrated in a non-limiting manner with reference to the schematic Figures 1 to 4.

Figure 1 is a longitudinal section of the mixing device according to the invention.

Figure 2 is a cross-section along the line II-II of Figure 1.

5        Figure 3 is a longitudinal section of the mixing device according to another embodiment of the invention.

Figure 4 is a longitudinal section of an embodiment of the reactor according to the invention.

10        Reference is now made to Figures 1 and 2. The mixing device 1 comprising a cylindrical mixing chamber 2, means for tangentially injecting a gaseous, fuel-comprising stream 3 comprising two inlet tubes 4, each having an outlet opening 5, and means for axially injecting a gaseous stream 6 of oxidant comprising an inlet tube 7  
15        having an outlet opening 8. The mixing chamber 2 is defined by a housing 9, comprising a top cover 10, and a cylindrical side wall 11. At its downstream end, the mixing chamber 2 is in fluid communication with a reaction zone (not shown), such as a catalytic partial  
20        oxidation zone. Optionally, a diffuser (not shown) is placed between the mixing chamber 2 and the reaction zone (not shown). The cylindrical mixing chamber 2 can have an oval or a round shape, preferably a round shape.

25        During normal operation, a stream 6 of a gaseous oxidant is axially injected into the mixing chamber 2 and a gaseous stream 3 comprising the fuel is tangentially injected along the inner surface of the cylindrical side wall 11 of the mixing chamber 2, such that a wall jet of the fuel-comprising stream 3 is created around the axial  
30        stream 6 of the oxidant. The occurrence of a wall jet of the fuel-comprising stream 3 avoids the presence of quasi-stagnant oxygen-rich zones along the cylindrical side wall 11.

35        The axially injected stream 6 has a diameter 12 and the tangentially injected stream 3 has a width 13. The

mixing chamber 2 has an inner diameter 14. Reference herein to the diameter 12 of the stream 6 of oxidant is to the diameter at the outlet opening 8 of the means for injecting the stream 6. Reference to the width 13 of the fuel-comprising stream 3 is to the width in the perpendicular plane wherein the fuel-comprising stream 3 is injected. A perpendicular plane refers to a plane perpendicular to the longitudinal axis of the cylindrical mixing chamber 2.

Figure 3 shows a preferred embodiment of the mixing device 1 of the present invention wherein the means for injecting a stream of fuel-comprising gas comprise two axially placed apart inlet tubes 4.

Figure 4 shows a reactor 15 according to an embodiment of the present invention. The reactor 15 comprises a mixing device 1 and a catalyst bed 16 in the form of a piece of ceramic foam. The mixing device 1 comprises a mixing chamber 2, means for tangentially injecting a stream 3 of fuel-comprising gas comprising two sets of two axially spaced apart inlet tubes 4, means for injecting an oxidant comprising a single inlet tube 7, and a diffuser 17 with an insert 18. The inlet tubes 4 of the means for injecting the fuel each have an inner diameter of 5 mm, the inlet tube 7 of the means for injecting the oxidant has an inner diameter of 8 mm. The height and the inner diameter 14 of the mixing chamber 2 are 26.5 and 24 mm, respectively.

It is a requirement of the mixing device of the present invention that the inner diameter 14 of the mixing chamber 2 and the dimensions and location of the means 4,5,7,8 for injecting the fuel and the oxidant are such that, during normal operation, the tangentially injected stream 3 comprising the fuel forms a wall jet around the axially injected stream 6 of the oxidant without impinging upon the axially injected stream 6.

Impingement is avoided if, during normal operation:

$$d_{ox} < d_{mix} - 2 \cdot d_{fuel}$$

wherein

5  $d_{ox}$  is the diameter 12 of the injected stream 6 of the oxidant at the outlet opening 8 of the means for injecting, i.e. at the point where the stream 6 is injected into the mixing chamber 2;

$d_{mix}$  is the inner diameter 14 of the mixing chamber 2; and

10  $d_{fuel}$  is the width 13 of the injected fuel-comprising stream 3 in the perpendicular plane wherein it is injected.

Preferably,  $d_{ox} < d_{mix} - 3 \cdot d_{fuel}$ .

15 It will be appreciated that  $d_{ox}$  is typically equal to the inner diameter of the outlet hole 8 of the injecting means. In the case of an oval mixing chamber 2 and/or an oval-shaped injected stream 6 of oxidant, the above inequality has to be fulfilled along each diameter of the mixing chamber 2.

20 Preferably, the width 13 of the fuel-comprising stream ( $d_{fuel}$ ) is not greater than a third of the inner diameter 14 of the mixing chamber 2 ( $d_{mix}$ ), more preferably,  $d_{fuel}$  is not greater than  $0.25 d_{mix}$ . The inner diameter 14 of the mixing chamber 2 is preferably  
25 at most 100 mm, more preferably at most 50 mm, even more preferably at most 30 mm.

The means for injecting the fuel-comprising stream 3 may be any means suitable for forming a wall jet of the fuel-comprising gas. Examples of suitable means for  
30 injecting are inlet openings or inlet tubes. The fuel-comprising gas may be tangentially injected through one single opening. Preferably, the means for injecting the fuel-comprising gas comprise at least two openings

arranged in a perpendicular plane at regular intervals along the circumference of the cylindrical mixing chamber 2, for example two opposite, diametrical openings as shown in Figure 1.

5           The means for injecting the stream 6 of oxidant may be any means suitable for forming a gas jet along the central longitudinal axis of the mixing chamber 2. Preferably, the oxidant is injected into the mixing chamber 2 through a single opening. Examples of a  
10           suitable means for injecting are a nozzle, an inlet opening or the outlet opening of an inlet tube.

          The opening(s) through which the stream 6 of the oxidant is injected into the mixing chamber 2 is (are) located at the same level or near the level of the top  
15           cover 10, preferably at the level of the top cover 10. The stream 3 of the fuel-comprising gas is preferably injected into the mixing chamber 2 at the same level or just downstream of the level at which the stream 6 of  
          oxidant is injected.

20           It has been found that the mixing rate can be further improved by injecting a stream 3 of the fuel-comprising gas having a width  $d_{fuel}$  and a major axis in the direction of the longitudinal axis of the mixing chamber  
          2 which is greater than its width  $d_{fuel}$ . Thus, a wall jet  
25           is formed over a greater length of the cylindrical side wall 11 of the mixing chamber 2. This can be achieved by means of an opening having an oval shape, for example a slit, with the major axis parallel to the longitudinal  
          axis of the mixing chamber 2 or by means of two or more  
30           axially placed apart openings, such as shown in Figures 3 and 4.

          The mixing device of the present invention is particularly suitable for operating at higher Re numbers, i.e. typically above  $10^4$ . Reference herein to Re numbers

is to Re numbers based on the viscosity and density of the mixed gases, on the superficial velocity of the mixed gases at the exit of the mixing chamber 2 and on the diameter 14 of the mixing chamber 2.

5           In order to achieve efficient mixing, the momenta of the gases to be mixed should be of the same order of magnitude. Preferably, the ratio of the momentum of the fuel-comprising gas to the momentum of the gaseous oxidant is in the range of from 0.3 to 3. Preferably, the  
10           density of the oxidant is higher than that of the fuel-comprising gas.

          The present invention further relates to a process for the catalytic partial oxidation of a fuel, which process comprises mixing a gaseous stream comprising the  
15           fuel and a gaseous oxidant to obtain a feed mixture, and contacting the feed mixture with a catalyst, wherein the gaseous stream comprising the fuel and the gaseous oxidant are mixed in the mixing device as hereinbefore defined.

20           Catalysts suitable for the use in the partial oxidation of a hydrocarbonaceous fuel are known in the art. Such catalysts generally comprises, as the catalytically active material, a metal selected from Group VIII of the Periodic Table of the Elements.  
25           References in this specification to the Periodic Table of the Elements are to the CAS version, as published in the CRC Handbook of Chemistry and Physics, 68th Edition. Catalysts comprising, as the catalytically active material, a metal selected from rhodium, iridium,  
30           palladium and platinum are preferred. Catalysts comprising rhodium or iridium are most preferred.

          Typically, the catalytically active material is supported on a catalyst carrier material. Suitable carrier materials are well known in the art and include  
35           refractory oxides, such as silica, alumina, titania,

zirconia and mixtures thereof, and metals. High-alloy, alumina-containing steel, such as fecralloy-type materials are particularly suitable metals. The catalyst may comprise the catalytically active metal in any  
5 suitable amount to achieve the required level of activity. Typically, the catalyst comprises the active metal in an amount in the range of from 0.01 to 20% by weight, preferably from 0.02 to 10% by weight, more preferably from 0.1 to 7.5% by weight. In addition to the  
10 catalytically active material, the catalyst may comprise a promoter or performance-enhancing compound. Suitable promoters are known in the art.

Preferably, the fuel-comprising gas is a gaseous hydrocarbonaceous fuel. Alternatively, the fuel-  
15 comprising gas is an inert carrier gas comprising droplets of a liquid hydrocarbonaceous fuel, for example naphtha, kerosene or synthetic gas oil.

The hydrocarbonaceous fuel is in the gaseous phase when brought into contact with the catalyst during  
20 operation. The fuel may contain compounds that are liquid and/or compounds that are gaseous under standard conditions of temperature and pressure (i.e. at 0 °C and 1 atm.).

Preferably, the hydrocarbonaceous fuel comprises  
25 methane, natural gas, associated gas or other sources of light hydrocarbons. In this respect, the term "light hydrocarbons" is a reference to hydrocarbons having from 1 to 5 carbon atoms.

The hydrocarbonaceous fuel may comprise oxygenates  
30 (being gaseous and/or being liquid under standard condition of temperature and pressure). Oxygenates to be used as (part of) the fuel in the process according to the present invention are defined as molecules containing apart from carbon and hydrogen atoms at least 1 oxygen  
35 atom which is linked to either one or two carbon atoms or

to a carbon atom and a hydrogen atom. Examples of suitable oxygenates comprise methanol, ethanol, dimethyl ether and the like.

5       The gaseous oxidant can be air, oxygen-enriched air or pure oxygen, preferably pure oxygen.

      In the process of the present invention, the feed mixture may optionally comprise steam. Optionally, the feed mixture may comprise carbon dioxide in a concentration of up to 60% by volume of the total feed  
10       mixture. The steam and or the carbon dioxide may be added with either the fuel-comprising gas or the oxidant, preferably with the fuel-comprising gas.

      In the process of the present invention, the feed mixture comprises the hydrocarbonaceous fuel and the  
15       oxidant preferably in amounts giving an oxygen-to-carbon ratio of from 0.3 to 0.8, more preferably of from 0.45 to 0.75. References herein to the oxygen-to-carbon ratio refer to the ratio of oxygen in the form of molecules ( $O_2$ ) to carbon atoms present in the hydrocarbonaceous  
20       fuel. Oxygen-to-carbon ratios in the region of the stoichiometric ratio of 0.5, i.e. ratios in the range of from 0.45 to 0.65, are especially preferred. If steam is present in the feed mixture, the steam-to-carbon ratio is preferably in the range of from above 0.0 to 3.0, more  
25       preferably from 0.0 to 2.0.

      The feed mixture is preferably contacted with the catalyst under adiabatic conditions. For the purposes of this specification, the term "adiabatic" is a reference to reaction conditions under which substantially all heat  
30       loss and radiation from the reaction zone are prevented, with the exception of hot gas leaving the catalyst. A substantial prevention of all heat losses, means that heat losses are at most 5% of the net calorific value of the feed mixture, preferably at most 1% of the net  
35       calorific value.



For applications on a commercial scale, elevated pressures, that is pressures significantly above atmospheric pressure are most suitably applied in the process of the present invention. The process is preferably operated at pressures in the range of from 2 to 150 bar (absolute). More preferably, the process is operated at pressures in the range of from 2 to 100 bar (absolute), especially from 5 to 50 bar (absolute).

Under the preferred conditions of high pressure prevailing in processes operated on a commercial scale, the feed mixture is preferably contacted with the catalyst bed at a temperature in the range of from 750 to 1400 °C, more preferably of from 850 to 1350 °C, even more preferably of from 900 to 1300 °C. Reference herein to temperature is to the temperature of the gas leaving the catalyst.

The feed mixture may be provided during the operation of the process at any suitable space velocity. It is an advantage of the process of the present invention that very high gas space velocities can be achieved. Thus, gas space velocities for the process (expressed in normal litres of gas per kilogram of catalyst per hour, wherein normal litres refers to litres under STP conditions, i.e. 0 °C and 1 atm.) are in the range of from 20,000 to 100,000,000 Nl/kg/h, more preferably in the range of from 50,000 to 50,000,000 Nl/kg/h. Space velocities in the range of from 500,000 to 30,000,000 Nl/kg/h are particularly suitable for use in the process.

#### EXAMPLE

In the reactor (15) as shown in Figure 4, a stream (6) of 4.4 grams per second of oxygen (density is 1.7) having a temperature of 22 °C is axially injected through the outlet opening (8) of inlet tube (7) and a stream of 4.7 grams per second of natural gas (density is

0.6) having a temperature of 235 °C is tangentially injected through the outlet openings (5) of inlet tubes (4) at atmospheric pressure. The resulting Re number is about 30,000.

5           The composition of the mixture of natural gas and oxygen is measured at several locations in the cross-sectional plane along line A-A, i.e. downstream of the insert (18). The residence time of the reactants in the mixing chamber (2) is 1 milliseconds, in the  
10 diffuser (17) 10 milliseconds. The value for  $\gamma$ , i.e. the time-averaged value for the relative deviation in  $X_{HC}/X_{O_2}$  in the cross-sectional plane along line A-A, is 0.03 and the value for  $\delta$ , i.e. the quotient of the root mean square value and the average value of the  $X_{HC}/X_{O_2}$  values  
15 measured at a single location in the plane along line A-A and at short time scales, is 0.03.

It will be appreciated that higher pressures, i.e. typically 40-50 bar, will be applied on a commercial scale.

C L A I M S

1. A mixing device for mixing a gaseous stream comprising a fuel and a gaseous oxidant, which mixing device comprises a cylindrical mixing chamber, means for injecting the gaseous stream comprising the fuel  
5 tangentially along the inner surface of the wall of the mixing chamber, and means for injecting a stream of the oxidant axially along the central longitudinal axis of the mixing chamber, wherein the diameter of the mixing chamber and the dimensions and location of the means for  
10 injecting the fuel and the oxidant are such that, during normal operation, the tangentially injected stream comprising the fuel forms a wall jet around the axially injected stream of the oxidant without impinging upon the axially injected stream.

15 2. A mixing device according to claim 1, wherein, during normal operation,

$$d_{ox} < d_{mix} - 3 \cdot d_{fuel}$$

wherein:

$d_{ox}$  is the diameter of the stream of the oxidant at the  
20 point where the stream of the oxidant is injected;  
 $d_{mix}$  is the diameter of the mixing chamber; and  
 $d_{fuel}$  is the width of the stream comprising the fuel in a perpendicular plane wherein the stream comprising the fuel is injected.

25 3. A mixing device according to claim 1 or 2, wherein the means for injecting the stream comprising the fuel comprise at least two openings arranged in a perpendicular plane at regular intervals along the circumference of the cylindrical mixing chamber.

4. A mixing device according to any of claims 1 to 3, wherein the means for injecting the stream comprising the fuel comprise two axially placed apart openings.
5. A mixing device according to any of the preceding claims, wherein  $d_{\text{fuel}}$  is not greater than  $0.33 d_{\text{mix}}$ , preferably not greater than  $0.25 d_{\text{mix}}$ .
6. A mixing device according to any of the preceding claims, wherein  $d_{\text{mix}}$  is at most 100 mm, preferably at most 50 mm, more preferable at most 30 mm.
- 10 7. A reactor for the partial oxidation of a fuel comprising a mixing device and a partial oxidation reaction zone, wherein the mixing device is the mixing device according to any of the preceding claims.
8. A reactor according to claim 7, wherein the partial oxidation reaction zone comprises a catalyst.
- 15 9. A process for the catalytic partial oxidation of a fuel, which process comprises mixing a gaseous stream comprising the fuel and a gaseous oxidant to obtain a feed mixture, and contacting the feed mixture with a catalyst, wherein the gaseous stream comprising the fuel and the gaseous oxidant are mixed in the mixing device according to any one of claims 1 to 6.
- 20 10. A process according to claim 9 wherein the gaseous stream comprising the fuel is a gaseous hydrocarbonaceous fuel, preferably natural gas or methane.
- 25 11. A process according to claim 9 or 10, wherein the gaseous oxidant is pure oxygen.
12. A process according to any of claims 9 to 11, wherein the feed mixture comprises the fuel and the oxidant in amounts giving an oxygen-to-carbon ratio of from 0.3 to 0.8, preferably of from 0.45 to 0.75.
- 30 13. A process according to any of claims 9 to 12, wherein the feed mixture is contacted with the catalyst at a

pressure in the range of from 2 to 150 bar (absolute), preferably of from 5 to 50 bar (absolute).

14. A process according to any of claims 9 to 13, wherein the feed mixture is contacted with the catalyst at a gas  
5 hourly space velocity of from 20,000 to 100,000,000 Nl/kg/h, preferably of from 50,000 to 50,000,000 Nl/kg/h, more preferably of from 500,000 to 30,000,000 Nl/kg/h.

15. A process according to any of claims 9 to 13, wherein  
10 the feed mixture is contacted with the catalyst at a temperature of from 750 to 1400 °C, preferably of from 850 to 1350 °C, more preferably of from 900 to 1300 °C.

THIS PAGE BLANK (USPTO)

A B S T R A C T

MIXING DEVICE

The invention relates to a mixing device (1) for mixing a gaseous stream comprising a fuel and a gaseous oxidant, which mixing device (1) comprises a cylindrical mixing chamber (2), means (4,5) for injecting a gaseous stream comprising the fuel tangentially along the inner surface of the wall of the mixing chamber (2), and means (7,8) for injecting a stream (6) of the oxidant axially along the central longitudinal axis of the mixing chamber (2), wherein the diameter (14) of the mixing chamber (2) and the dimensions and location of the means (4,5,7,8) for injecting the fuel and the oxidant are such that, during normal operation, the tangentially injected stream comprising the fuel forms a wall jet around the axially injected stream (6) of the oxidant without impinging upon the axially injected stream (6). The invention further relates to a reactor for the partial oxidation of a hydrocarbonaceous fuel comprising the mixing device and to a process for the catalytic partial oxidation of a hydrocarbonaceous fuel using the mixing device.

(Figure 1)

THIS PAGE BLANK (USPTO)  
THIS PAGE BLANK (USPTO)



TS 0346 EPL

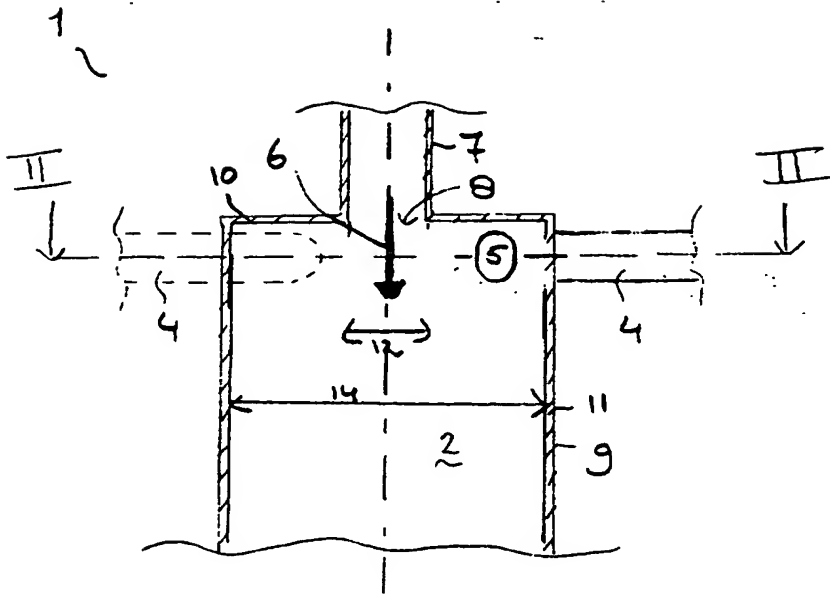


Fig 1

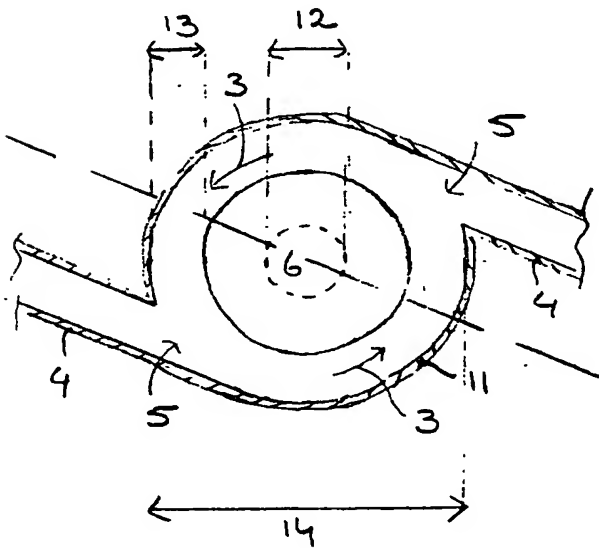


Fig 2

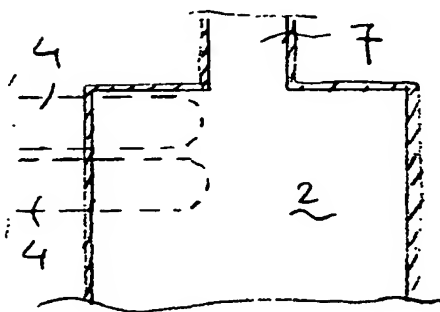


Fig 3

15

1

TS 0396 EPL

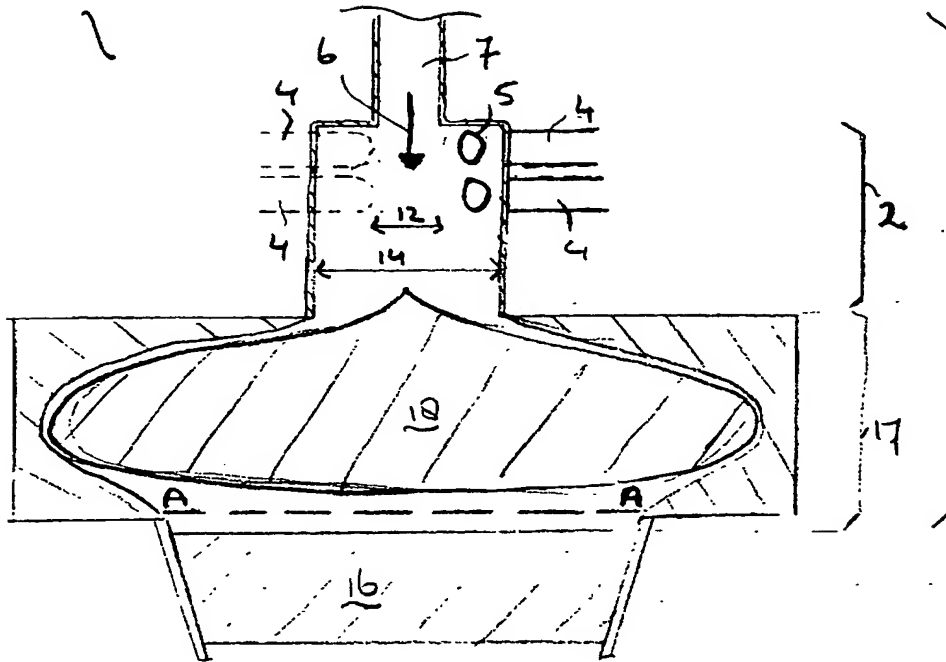


Figure 4

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)